

DVP-7032UHE

4-ch 4K30 HDMI 2.0 PCIe Video Capture Card



Features

- 4-channels HDMI video input with H.264 software compression
- 4096 x 2160@30/25fps (HDMI) for display and recording
- PCIe x4 (Gen2) host interface
- Windows/Linux OS supported

Introduction


DVP-7032UHE is a PCIe software compression capture card which is specially designed for 4K resolution video capture applications. It supports up to 4 channels of 4K resolution, 4096 x 1260@30/25fps video from 4 x HDMI input. DVP-7032UHE support live video recording from 4K resolution signal sources into H.264 files.

DVP-7032UHE is an ideal solution for various video capture applications.

Specifications

Video	Video Standard	HDMI 2.0
	Video Input	4 x HDMI
	Compression	SW H.264
	Max. resolution / FPS	4096 x 2160@30/25fps input 4096 x 2160@30/25fps output
	Raw Data Format	YV12, NV12, YUY2, RGB24, RGB32, P010
Audio	Audio input	4 x HDMI Embedded Audio
Multiple cards support		Yes
System Requirements	CPU (Display)	Intel® Core™ i3-4330
	CPU (Recording)	Intel® Core™ i3-4330
	Memory	4 GB
	VGA	1024 x 768, DirectX 9.0c
	Operating System	Windows 7 / Windows 8 / Windows 8.1 / Windows 10/ Window 11 Linux 4.8 or Higher (32-bit and 64-bit)
Physical Characteristics	Host Interface	PCIe
	Operating Temperature	-10~70°C
	Storage Temperature	-40~85°C
	Dimensions	111.14x101.01 (mm) PCIe
	Safety	CE/FCC

Connection Diagram

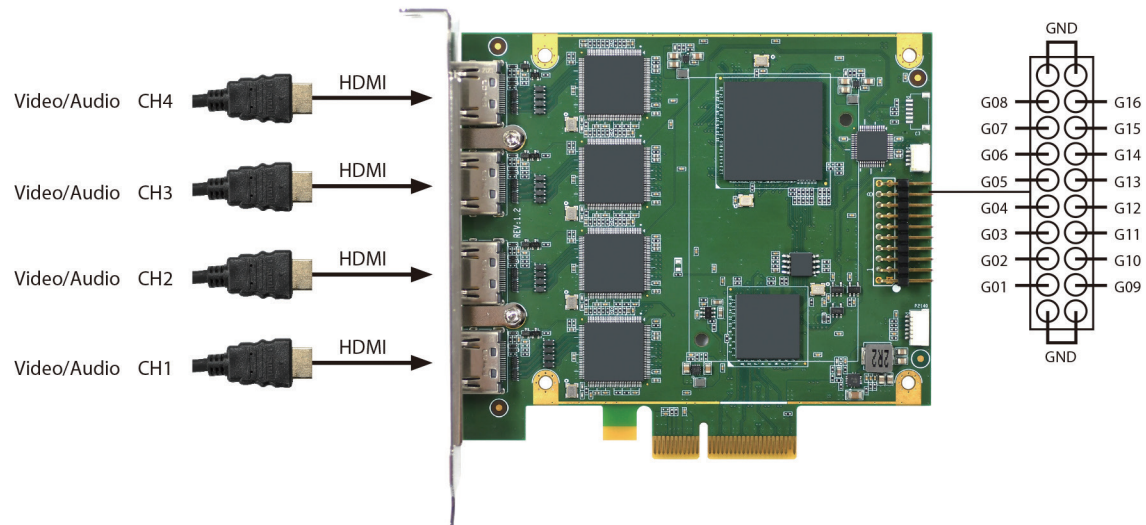

Ordering information

Part Number	Description
DVP-7032UHE	4-ch 4K30 HDMI 2.0 PCIe Video Capture Card

Packing list

Item	Amount
DVP-7032UHE card	1 (piece)