


K120 FULLY RUGGED TABLET



- Processeur Intel® Core™ i5/i7 de 11e génération
- Écran tactile capacitif LumiBond 2.0 Full HD de 12,5" avec technologie de lecture en plein soleil Getac (1 200 nits)
- Sécurité d'entreprise améliorée avec la technologie Intel® vPro™, la caméra de reconnaissance faciale Windows Hello et de nombreuses autres options d'authentification multifacteur
- Utilisation multimode grâce à un large choix d'accessoires
- Double batterie avec technologie de remplacement à chaud LifeSupport
- Thunderbolt™ 4 se distingue par sa très haute vitesse et ses performances inégalées



K120 3D demo

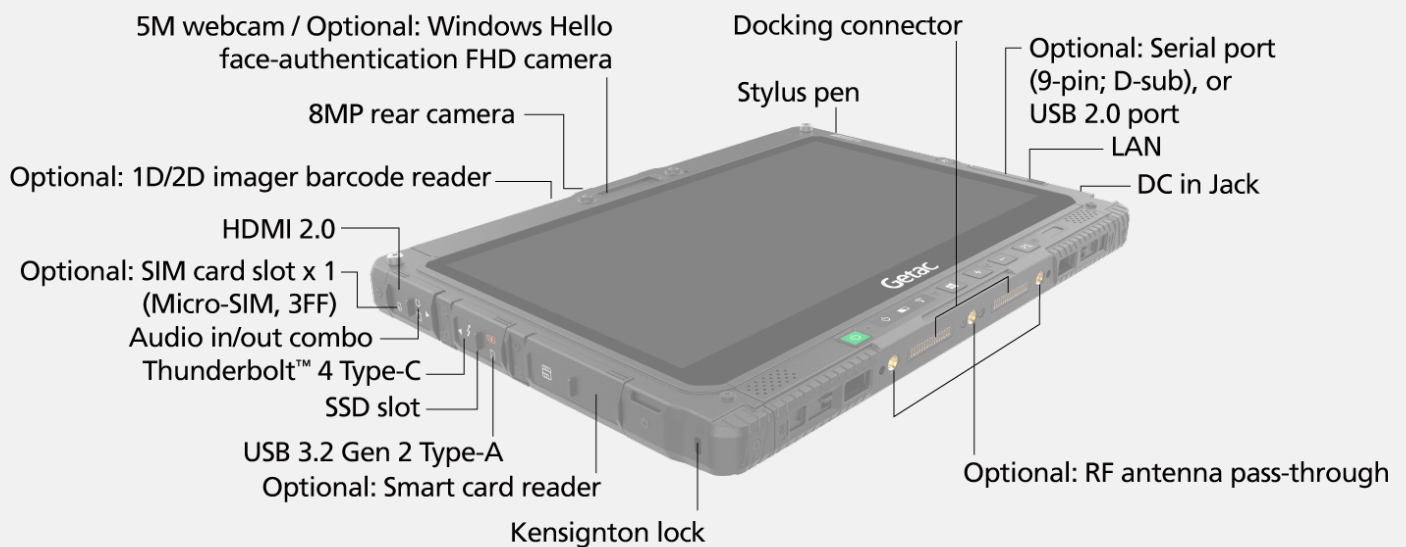

SPECIFICATIONS

Generation

G2-R

Operating System

Windows 11 Pro

Mobile Computing Platform

Intel® Core™ i5-1135G7 Processor
Max. 4.2GHz with Intel® Turbo Boost Technology
- 8MB Intel® Smart Cache

Platform options:

Intel® Core™ i5-1145G7 vPro® Processor
Max. 4.4GHz with Intel® Turbo Boost Technology
- 8MB Intel® Smart Cache

Intel® Core™ i7-1165G7 Processor
Max. 4.7GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

Intel® Core™ i7-1185G7 vPro® Processor
Max. 4.8GHz with Intel® Turbo Boost Technology
- 12MB Intel® Smart Cache

VGA Controller

Intel® Iris® Xe Graphicsⁱ

Display

12.5" Wide Viewing Angle TFT LCD FHD (1920 x 1080)
Protection film

1,200 nits LumiBond display with
Getac sunlight readable technology
Capacitive multi-touch screen

Storage & Memory

16GB DDR4
Optional: 32GB / 64GB DDR4

256GB PCIe NVMe SSD
Optional: 512GB / 1TB / 2TB PCIe NVMe SSD

Keyboard

Power button
5 tablet programmable buttons

Pointing Device

Touchscreen
- Capacitive multi-touch screen
- Optional: Dual mode touchscreen
(multi-touch and digitizer)

Expansion Slot

Optional: 1D/2D imager barcode reader
Optional: Serial port (9-pin; D-sub), or USB 2.0 port

I/O Interface

Tablet
5M webcam x 1ⁱⁱ
8M pixels auto focus rear camera x 1
Audio in/out combo x 1
DC in Jack x 1
USB 3.2 Gen 2 Type-A x 1
Thunderbolt™ 4 Type-C x 1
LAN (RJ-45) x 1
HDMI 2.0 x 1
Docking connector x 2
Optional: SIM card slot x 1 (Micro-SIM, 3FF)ⁱⁱⁱ
Optional: Windows Hello face-authentication
FHD camera (front-facing) x 1ⁱⁱ
Optional: RF antenna pass-through for GPS,
WWAN and WLAN

Optional keyboard dock:

DC in Jack x 1
USB 3.2 Gen 1 Type-A x 3
LAN (RJ45) x 1
HDMI 2.0 x 1
Display port 1.2 x 1
Serial port (9-pin; D-sub) x 1
Optional: RF antenna pass-through for GPS,
WWAN and WLAN

Communication Interface

10/100/1000 base-T Ethernet
Intel® Wi-Fi 6 AX201, 802.11ax
Bluetooth (v5.2)^{iv}
Optional: Dedicated GPS^v
Optional: 4G LTE mobile broadband
with integrated GPS^{iii,iv}
Optional: 5G Sub-6 with integrated GPS^{xviii, xix}

Security Feature

TPM 2.0
Kensington lock
Optional: Intel® vPro® Technology
Optional: Smart card reader or HF RFID reader^{vi, vii}
or Fingerprint reader^{viii}
Optional: Windows Hello face-authentication
FHD camera (front-facing)ⁱ

Power

AC adapter (90W, 100-240VAC, 50/60Hz)
Li-ion battery
(11.1V, typical 2100mAh; min. 2040mAh) x 2
LifeSupport battery swappable technology
Optional: High capacity Li-ion battery
(14.4V, typical 3450mAh; min. 3300mAh) x 2

Dimension (W x D x H) & Weight

Tablet
329.5 x 238 x 24mm (12.97" x 9.37" x 0.94")
1.7kg (3.75lbs)^{ix}

Tablet + Optional keyboard dock:
340.5 x 307.5 x 47mm (13.40" x 12.10" x 1.85")
3.13kg (6.9lbs)^{ix}

Rugged Feature

MIL-STD-810H certified
IP66 certified
MIL-STD-461G certified^x
Vibration & 6ft (1.8m) drop-resistant^{xi}
Optional: ANSI/UL 121201, CSA C22.2 NO. 213
(Class I, Division 2, Groups A, B, C, D)^{xii}

Environmental Specification

Temperature^{xiii} :
- Operating: -29°C to 63°C / -20°F to 145°F
- Storage: -51°C to 71°C / -60°F to 160°F
Humidity:
- 95% RH, non-condensing

Pre-installed Software

Getac Utility
Getac Camera
Getac Geolocation
Getac Barcode Manager^{xiv}
Getac Driving Safety Utility (trial version)
Getac KeyWedge Barcode Reader Utility (trial version)
Optional: Absolute Persistence[®]

Optional software

Getac Driving Safety Utility
Getac KeyWedge Barcode Reader Utility
Getac Device Monitoring System (GDMS)
Getac vGPS Utility^{xv}

Accessories

Battery (11.1V, typical 2100mAh; min. 2040mAh)
AC adapter (90W, 100-240VAC)
Capacitive stylus with tether

Optional:

Carry bag
Battery (11.1V, typical 2100mAh; min. 2040mAh)
High capacity Li-ion battery
(14.4V, typical 3450mAh; min. 3300mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (90W, 100-240VAC)
Office dock AC adapter (120W, 100-240VAC)
MIL-STD-461 AC adapter (90W, 100-240VAC)
DC-DC vehicle adapter (120W, 11-32VDC)
Digitizer pen with tether
Capacitive stylus with tether
Protection film
Hard handle
Rotating hand strap with kickstand
Shoulder strap (2-point)
Shoulder harness (4-point; handsfree)
Vehicle cradle^{xvi}
Keyboard dock
Vehicle dock^{xvii, xviii}
Office dock
DS100 USB-C docking station
Spare SSD kit
100W Type-C adapter
Getac rugged keyboard

K120 FULLY RUGGED TABLET

Bumper-to-Bumper warranty

Les accidents surviennent quand on s'y attend le moins, en particulier avec les produits renforcés soumis à des conditions difficiles, et peuvent alors engendrer une mise hors service des équipements ainsi que des périodes d'interruption très coûteuses. C'est pourquoi Getac propose de prendre en charge les dommages accidentels dans sa garantie Bumper-to-Bumper, afin de réduire les coûts informatiques de votre entreprise. La garantie Bumper-to-Bumper, c'est la tranquillité d'esprit assurée, avec le meilleur service logistique Pack & Collect d'Europe, puis la réparation et le renvoi rapide par les experts internes de Getac. En quelques jours seulement, vous êtes certain de récupérer vos appareils opérationnels.

Standard

Garantie Bumper-to-Bumper de 3 ans

- I. Units equipped with dual channel memory come with Intel® Iris® Xe Graphics.
- II. 5M webcam and optional Windows Hello face-authentication FHD camera (front-facing) are mutually exclusive options.
- III. Units with 4G LTE option comes with an embedded SIM card slot.
- IV. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- V. Dedicated GPS is mutually exclusive with 4G LTE mobile broadband. Supports GPS and Glonass.
- VI. 13.56MHz HF RFID/NFC reader(ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- VII. LF/HF RFID reader option is not Energy Star 8.0 compliant.
- VIII. Smart card reader, HF RFID reader and Fingerprint scanner are mutually exclusive options.
- IX. Weight and dimensions vary from configurations and optional accessories; optional high capacity batteries add approx. 11mm (H), 0.20kg.
- X. MIL-STD-461 90W AC adapter sold separately.
- XI. Drop test results vary from configurations and optional accessories.
- XII. Available with limited configurations and environment conditions.
- XIII. Tested by an independent third-party test lab following MIL-STD-810H.
- XIV. Available when barcode reader option is selected.
- XV. Models require either embedded or standalone GPS module.
- XVI. Gamber Johnson and Havis vehicle docks are e-mark certified.
- XVII. Available for laptop and tablet mode.
- XVIII. One physical SIM card slot and one eSIM. Network service may vary depending on local telecommunication providers.
- XIX. Support GPS, GLONASS, Galileo, BeiDou and QZSS.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock for Tablet Mode	Vehicle Dock for Laptop Mode	Office Dock for Tablet Mode	Office Dock for Laptop Mode
Serial Port	1	1	1	1
External VGA	1	1	1	1
Microphone	-	-	1	1
Audio Output	-	-	1	1
DC in Jack	1	1	1	1
USB	USB 2.0 x 3 USB 3.2Gen 1 x 3	USB 2.0 x 3 USB 3.2Gen 1 x 3	USB 2.0 x 2 USB 3.2Gen 1 x 3	USB 2.0 x 2 USB 3.2Gen 1 x 3
LAN	2	2	2	2
HDMI 1.4	1	1	1	1
RF Antenna Connector	3 (WWAN, WLAN,GPS)	3 (WWAN, WLAN,GPS)	-	-
Kensington Lock	1	1	1	1

Getac



GETAC TECHNOLOGY CORPORATION

12, avenue du Québec Bâtiment Goyave 91140
Villebon sur Yvette Tel: +33 160 12 80 60
Sales-Getac-France@getac.com |
www.getac.com/fr/

Copyright © 2023 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Les informations sont fournies ici pour référence seulement, les spécifications disponibles doivent faire l'objet d'un devis sur demande.